

User Manual Book

Showcase Cooler

Finestra Series

SC 2201 L, SC 2801 L, SC 2691 L, SC 2071 L, SC 1431 L

MODENA


Thank you for your trust in choosing MODENA products for your household needs. With your satisfaction as our priority, we constantly aim to deliver stylishly designed products equipped with state-of-the-art technology to assist you in your daily activities.

This is your guidebook containing everything you need to know about our product. Please reach out to us if you need further assistance or other information via our Customer Care or our official website www.modena.com.

MODENA

CONTEN	PAGE.	
• Introduction		2
• Part 1	: Name of Parts	4
• Part 2	: Installation	4
• Part 3	: How to Use	6
• Part 4	: Maintenance	8
• Part 5	: Precaution & Action	8
• Part 6	: Points of Attention	9
• Part 7	: Problem & Solutions	10
Part 8	: Specification	11

Part 1: Names of Part

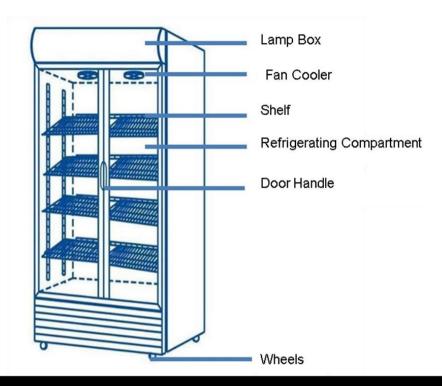

Part 2: Installation


SAFETY PRECAUTIONS

- Read the safety instructions / precautions carefully before using the unit.
- The purpose of the safety instruction/ precautions in this manual book is to ensure safe and correct use of the unit to minimize risk that could cause serious damage and injury to you or other persons. The safety instruction/ precautions are divided into WARNING and CAUTION. Cases where improper handling of the unit could lead to death or serious injury are listed under the WARNING heading. However, The cases listed under the CAUTION heading could also lead to serious result. To ensure the safety, adhere strictly to both types of safety precautions.
- WARNING : Improper handling of the unit could lead to death or serious injury.
- CAUTION: Improper handling of the unit could lead to serious result depending on the circumstances.
- Text set off by the exclamation mark contains information that should be strictly adhered to
- After reading the instruction manual, store it an easily accessible place where the user of this product can easily find it.


PRECAUTIONS FOR INSTALLATION

M WARNING


Installation should be performed only by the dealer or a qualified expert. Attempting to install the unit yourself could result in water leakage, refrigerant leakage, electrical shock, or fire.



Install the Showcase Cooler on even and sturdy surface. Uneven surface may cause objects in it to fall.




Provide adequate space for air circulation between the Showcase Cooler and the wall to minimize the operational costs and to maximize compressor's age.




Do not put the Showcase Cooler near the heat source such as stove, hot plates etc. And avoid placing unit under direct sunlight which may hamper with the cooling process.




Do not use the unit in an open location, keep it away from sunlight and exposed to rain water. Using Showcase Cooler which has been exposed to rainwater will result in electricity leakage.



Make sure the voltage is set to 220 volt and the frequency to 50 Hz. Do not use cord extension or branched outlet since it poses risks of shortage, overheating and fire.



If the unit must be installed in a humid environment, make sure to install a circuit breaker to avoid shortage.



Part 3: How to Use

BEFORE USE

- Open the carton box, tape, etc, and leave doors open ventilate for a while.
- The unit is cleaned before shipment. However, cleaning the inside of the unit after delivery is highly recommended.
- Please insert power supply plug into the wall outlet, the unit uses a single-phase.
- Leave the unit operational for around 1 hour to cool the inner chamber before putting objects inside it.

WAIT 5 MINUTES OR MORE BEFORE RESTARTING

Restarting the unit immediately after it has been turned off may cause fuses to blow and activate the circuit breaker, the compressor may be overload, and / or other damage may occur.

TEMPERATURE ADJUSMENT

The thermostat has been adjusted using the temperature in the factory. To adjust, can be done by turning the temperature control knob, rotate to the right to lower the temperature. To raise the temperature turn the knob to the left. Adjust the temperature according to usage, excessive cooling will increase unnecessary power consumption.

DRAIN TRAY

Defrosting is done automatically and disposal of water collected in the drain tray. The water in the drain tray evaporates automatically. In certain humidity level, a large amount of water may be accommodated in the tray disposal, so it is not completely evaporate, so it needs to be checked and drained once each day.

EFICIENT USE

Please follow the instructions below, to save energy. To prevent cold air out, open and close the door unit as soon as possible. Install the unit in a well ventilated place.

SHELF HEIGHT ADJUSTMENT

Height of shelves can be adjusted. Arrange a rack in accordance with the size of the items to be stored in the showcase.

PLACING ITEMS IN THE SHOWCASE

This showcase employs a forced circulation of cold air system. If the cold air circulation is blocked, the goods will not be sufficiently cooled.

Consider the following: Do not let the stuff blocking the inlet and outlet of cold air. Arrange the placement of goods that do not exceed the size of the rack. The distance between the shelves and the door is used for circulation of cold air. Place the items evenly on all shelves. Do not store items on the bottom. Put the stuff on the shelves.

PRECAUTION FOR INSTALLATION



WARNING




Do not damage, modify, excessively bend, strain, twist or bundle up the power cord. Also, placing heavy objects the power cord or squeezing it in a tight place could damage it, possible resulting in electrical shock or fire.





Never use flammable spray cans or leave flammable substances near the unit. Sparks from electrical switches could result in explosion and fire.



•	The cooler is intended for strorage and display of beverages for sale. Do not use for other purpose than intended as this could adversely affect items placed in the unit.				
•	Store the unit in a location where the floor it is not exposed to rain. Using a unit that has been exposed to rain could result in electrical leakage and electrical shock.				
0	Leave disassembly and disposal of the unit to qualified experts.				
	Grasp the handle when closing the door. Holding at other positions could result in pinched fingers and injury.				
0	Make sure that the unit does tip over or fall when it is moved. A falling unit could cause serious injury.				
\Diamond	Maximum load that can be accommodated by each rack is 30 kg. Place the item carefully, do not throw stuff on the shelf and do not place items with a total weight of more than 30 kg on each shelf, because the rack can fall, and potentially cause injury.				
0	Make sure the rack has been installed correctly and firmly. Shelves are improperly installed can fall and potentially cause injury.				
•	If the unit will be stored temporarily, be sure to not store the unit in a location where children play and do preventive measures so that the door can not be completely shut down the unit. This will minimize the risk of a child trapped inside the unit.				

Part 4: Maintenance

To prevent any electrical shock hazards or injury by rotating circulation fan, always disconnect the power cord plug from the wall outlet before cleaning.



A EXTERIOR AND COOLER COMPARTEMENT

Clean the freezer using soft and dry cloth. If it's very dirty, use cloth that is lightly soaked with soap water and rinse using wet cloth. Then rinse with a cloth that has been dipped



WARNING: Do not splash water directly onto the cooler and do not wash with water. Short circuit and electrical shock could result.

Clean the cooler regularly to keep it clean at all times.

Do not use polishing powder, soap powder, gasoline, benzene, oil or hot water as this will damage the paint and plastic components.



Part 5: Precaution & Action



Do not pour water onto the unit or wash with water to avoid shortage and electricity leakage.



Do not attempt to insert a finger, stick etc into the cold air outlet since the circulation fan rotates at high speed

and will result in injury and damage to the cooling fan.






Do not put heavy or watery objects on top of the unit to avoid spill which may damage the electrical components' insulation.



Refrain from touching the unit during gas leakage. Open the windows and doors to vent out the gas. Gas leakage







Do not hang onto the door nor climb the unit. The unit could tip over or fall and cause material damage or injury




Do not push hand against or apply excessive force to glass surface as the glass could be break and cause injury.








Do not put flammable objects inside the freezer / refrigerator.




At the time of repeal outlet, unplug on the head and do not pull the cord because the cable can be easily damaged.



Disconnect the power plug from the wall outlet before moving the unit and make sure that the power cord is not damaged during transport. A damaged power cord could result in electrical shock and / or fire.



Do not attempt to self-repair damaged unit. Contact MODENA Service Center if repair is needed on the unit.



Part 6: Points of Attention

CHECKS

To ensure the safety, perform the following checks after cleaning.

- Is the power plug firmly inserted into a dedicated wall outlet? Confirm that the plug is not abnormally hot.
- Make sure the power cord on good condition, not damaged or defective. Should the slightest Irregularity be observed, contact the dealer from whom you purchased this unit or our Service Center, if there is damage or non-compliance.

IN CASE OF THE FOLLOWING:

1. DURING POWER OUT

- Keep opening and closing of the door to a minimum. Avoid placing new items in the cooler as this will raise the temperature inside the compartment.
- Unplug the power cord.
- Re-plug the power cord around 10-15 minutes after the electricity current becomes stable again.

2. IF NOT USED FOR A LONG TIME

Remove all items from the compartment and Unplug the power cord from the outlet. Clean the inside of the compartment and wipe away all water. Leave the door open to dry out the compartment to prevent fungi and unpleasant odor.

3. MOVING OUT

- Unplug the power cord.
- When moving the unit, make sure the legs of the refrigerator do not damage the power cord.
- Make sure the feet do not touch the floor unit at the time of moving.
- Make sure the refrigerator does not hit the stairs, doorways, etc.

4. TEMPORARY STORAGE

- Place a buffer, a piece of wood, or other materials in between the door and the main unit to prevent the unit door closed.
- Make sure not to store the unused cooler at a location where children play. Should a child enter the compartment and the door is closed, the child may not be able to open the door from the inside.

Part 7: Problem & Solution

Check the following before contacting our Service Center in the event of dysfunction. If the problem continues after taking the proper remedial action, disconnect the power cord plug from the wall outlet. Transfer the items stored in the cooler to a box or other container. Then contact the dealer from whom you purchased this unit or our Service Center, and be ready to provide information as listed in "REQUIRED INFORMATION" below.



CAUTION: To prevent any electrical shock hazards, do not disconnect the power cord plug from the wall outlet with wet hands.

Unit is not working	Is the power cord unplugged?Is there a problem with the power source / fuse box?Is the circuit breaker activated?
Unit is not cold	 Is the temperature properly regulated? Is the air circulation inside the unit obstructed? Is there too much food being stored inside the unit? Is the unit door opened too frequently? Is the condenser obstructed? Is the unit installed in a hot environment?
Food is Frozen	Is the thermostat set to very cold?Is the food / drink stored near the air outlet?
Noise	Is the freezer put on even surface?Is the back of the freezer against the wall?Is the cooler put against other objects?
Condensation on the outer surface of the freezer:	- Dew may form on the outer surface of the freezer when the ambient air is too hot / humid. Condensation occurs during high humidity and when the water particles in the air come into contact with cold surface. This is perfectly normal. Simply wipe the surface using dry cloth.

REQUIRED INFORMATION

- 1. Nature of malfunction (as accurately as possible).
- 2. Number / type of product.
- 3. Serial number.
- 4. Customer's name, address, phone number.
- 5. Year and date of purchase.
- 6. Desired date for service visit.

Part 8: Specification

MODEL	SC 2201 L	SC 2801 L	SC 2691 L	SC 2071 L	SC 1431 L
Color	Black (L)				
Number of doors	2	2	2	2	1
Capacity(liter)	1200	800	688	1000	430
Temperature (Celsius)	0-10	0-10	0-10	0-10	0-10
CFC-free compressor	Yes	Yes	Yes	Yes	Yes
For tropical areas	Yes	Yes	Yes	Yes	Yes
Lamps in the refrigerating compartment	Yes	Yes	Yes	Yes	Yes
Detachable shelf	10	10	5	10	4
Glass door hot air	Yes	Yes	Yes	Yes	Yes
Fan cooling system	Yes	Yes	Yes	Yes	Yes
Number of glasses on the door (layers)	2 layers				
Lock	Yes	Yes	Yes	Yes	Yes
Light box above the door	Yes	Yes	Yes	Yes	Yes
Wheels	Yes	Yes	Yes	Yes	Yes
Power (watt)	519	431	450	750	330
Voltage (Volt)	220	220	220	220	220
Frequency (Hz)	50	50	50	50	50
Product dimension	1330 x 720	1000 x 720	1120 x 585	1130 x 720	606 x 660 x
(LxWxH) mm	x 2023	x 2020	x 1900	x 2023	2000
Weight(Kg)	165	135	113	139	82

 $S = Stainless \quad W = White \quad B = Brown \quad V = Silver \quad G = Gray \quad L = Black \quad R = Mirror$

Specifications of this appliance may change without notice to improve the quality of the product. Figures in this manual are schematic and may not match your product exactly. Values stated on the machine labels or in the documentation accompanying it are obtained in laboratory in accordance with the relevant standards. Depending on operational and environmental conditions of the appliance, values may vary



